

QUEST SERIES HOOD WASHER INSTALLATION INSTRUCTIONS

Already Installed on Grill:


- Hood Screw x2
- Original Washer x2

Included in Installation Kit:

- New Washer (**16063**) x2

Tools Required:

- 6mm Allen Key
(*Not included*)

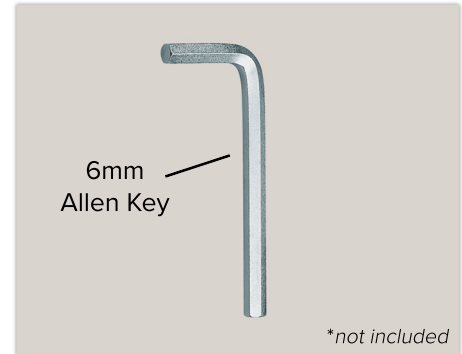

Installation Steps:

1. Begin with one side only to ensure the hood remains supported during the process.
Notice: Before removing the **Hood Screw**, confirm that the hood is resting securely on the cylindrical post (or bushing) protruding from the rear hood frame. This support ensures the hood stays properly aligned and does not shift or fall when the hinge **Hood Screw** is removed.
2. Using a **6mm Allen Key**, remove the **Hood Screw** and **Original Washer** from the hinge port. Retain the **Original Washer**.
Note: The **Original Washer** may be stuck to the **Hood Screw** head but can be removed with light effort.
3. On the **Hood Screw**, first slide on the larger **New Washer (16063)**, placing it directly next to the **Hood Screw** head.
4. Next, slide the **Original Washer** onto the **Hood Screw** after the **New Washer (16063)**.
5. Reinsert the **Hood Screw** assembly into the hinge port and tighten securely (do not over tighten) with the **6mm Allen Key**.
6. Repeat the process on the opposite side of the hood.

